



Trough chain conveyors TKF

For inclining transport
of large conveying quantities

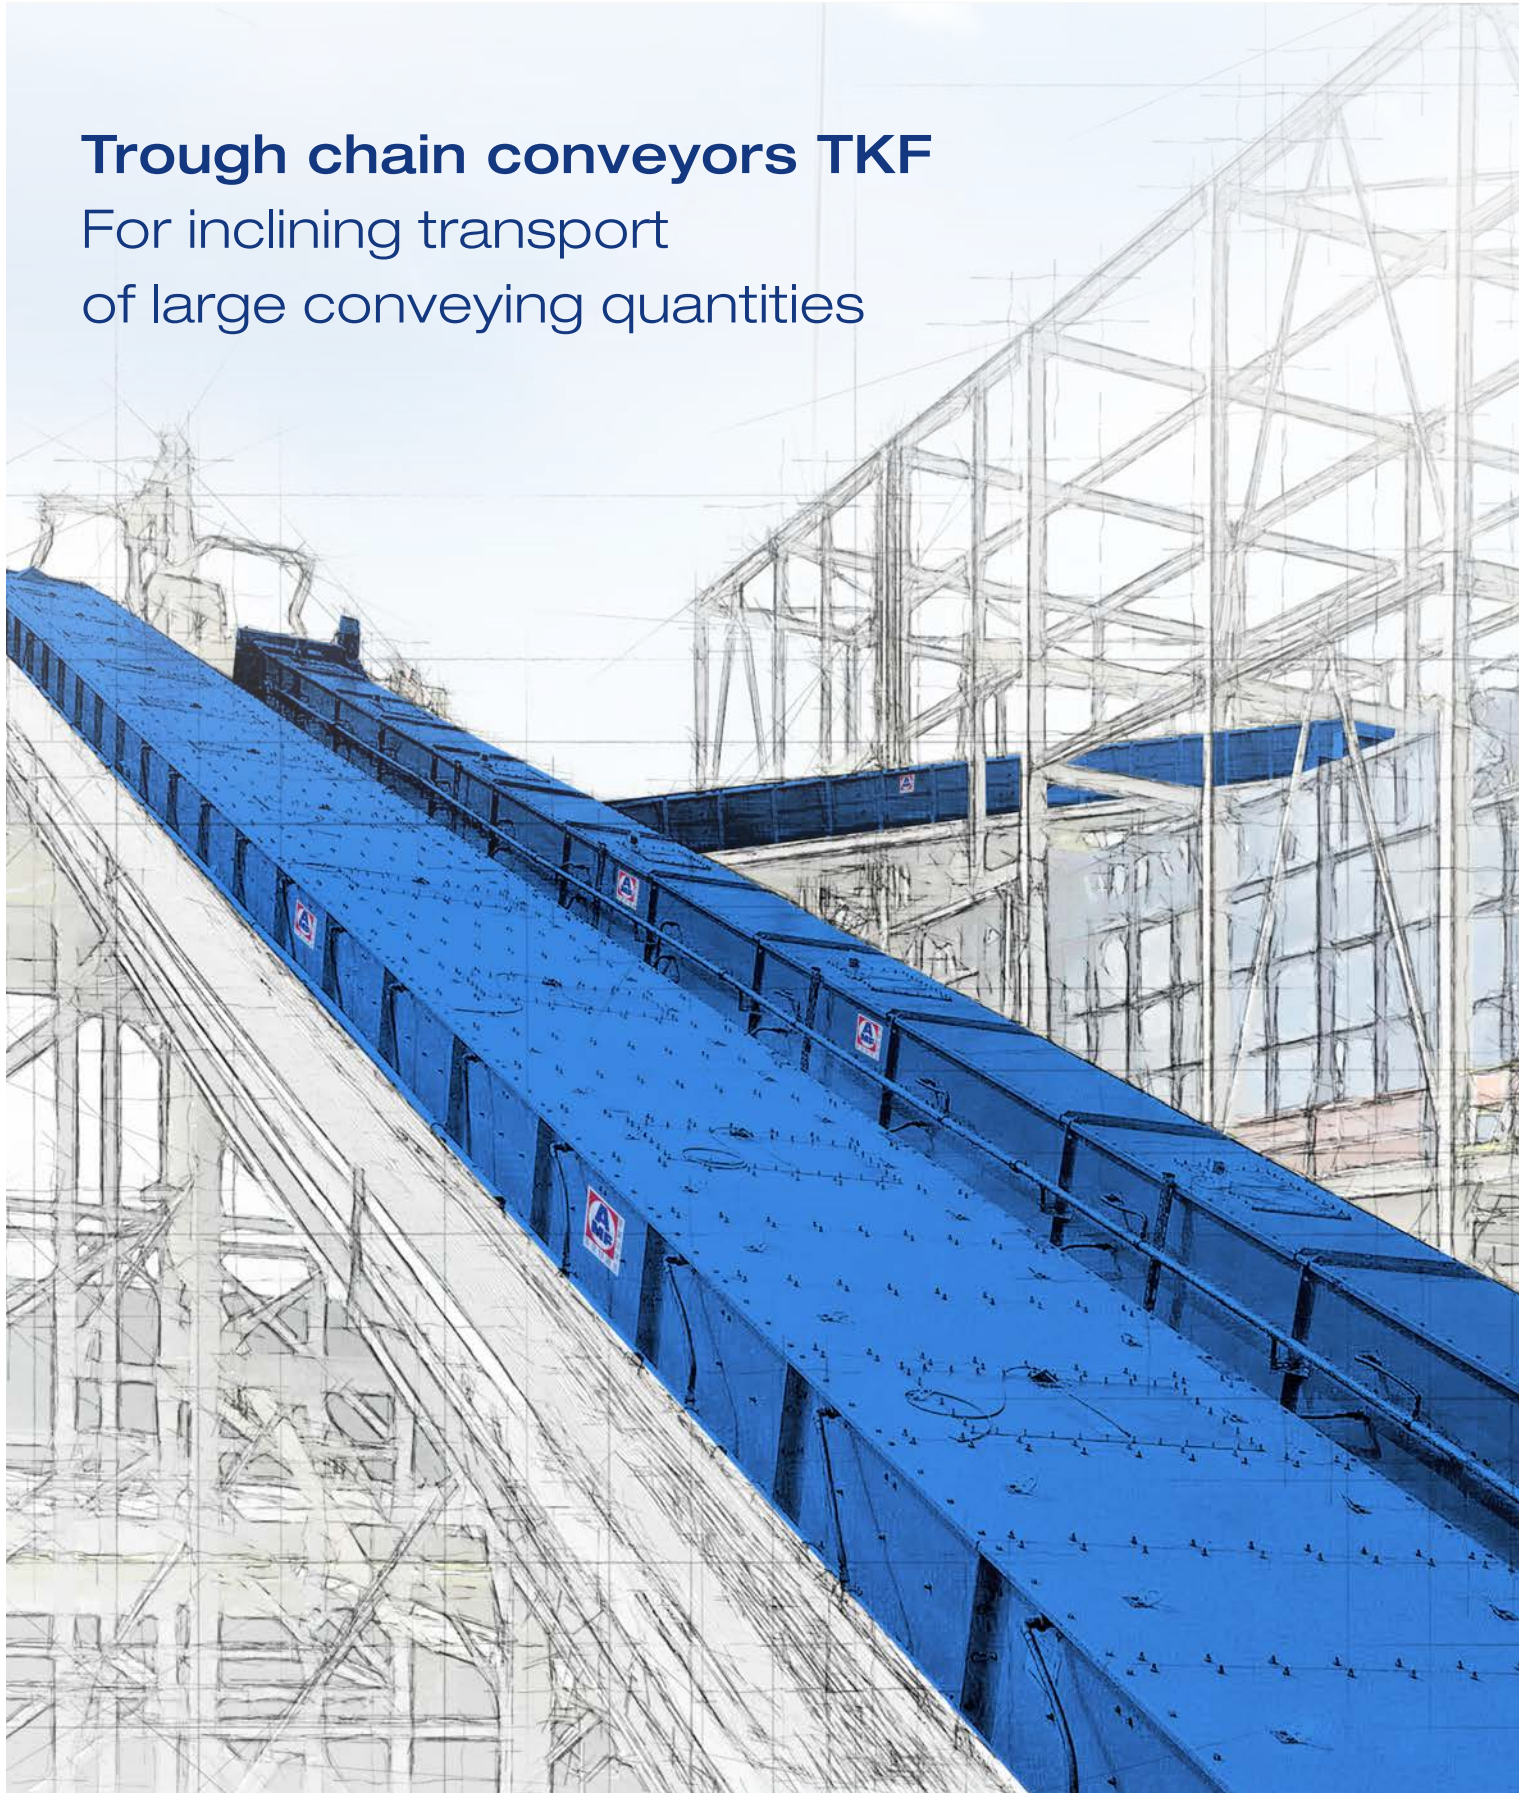

CONVEYORS
INDUSTRIAL SOLUTIONS

www.amf-bruns.com

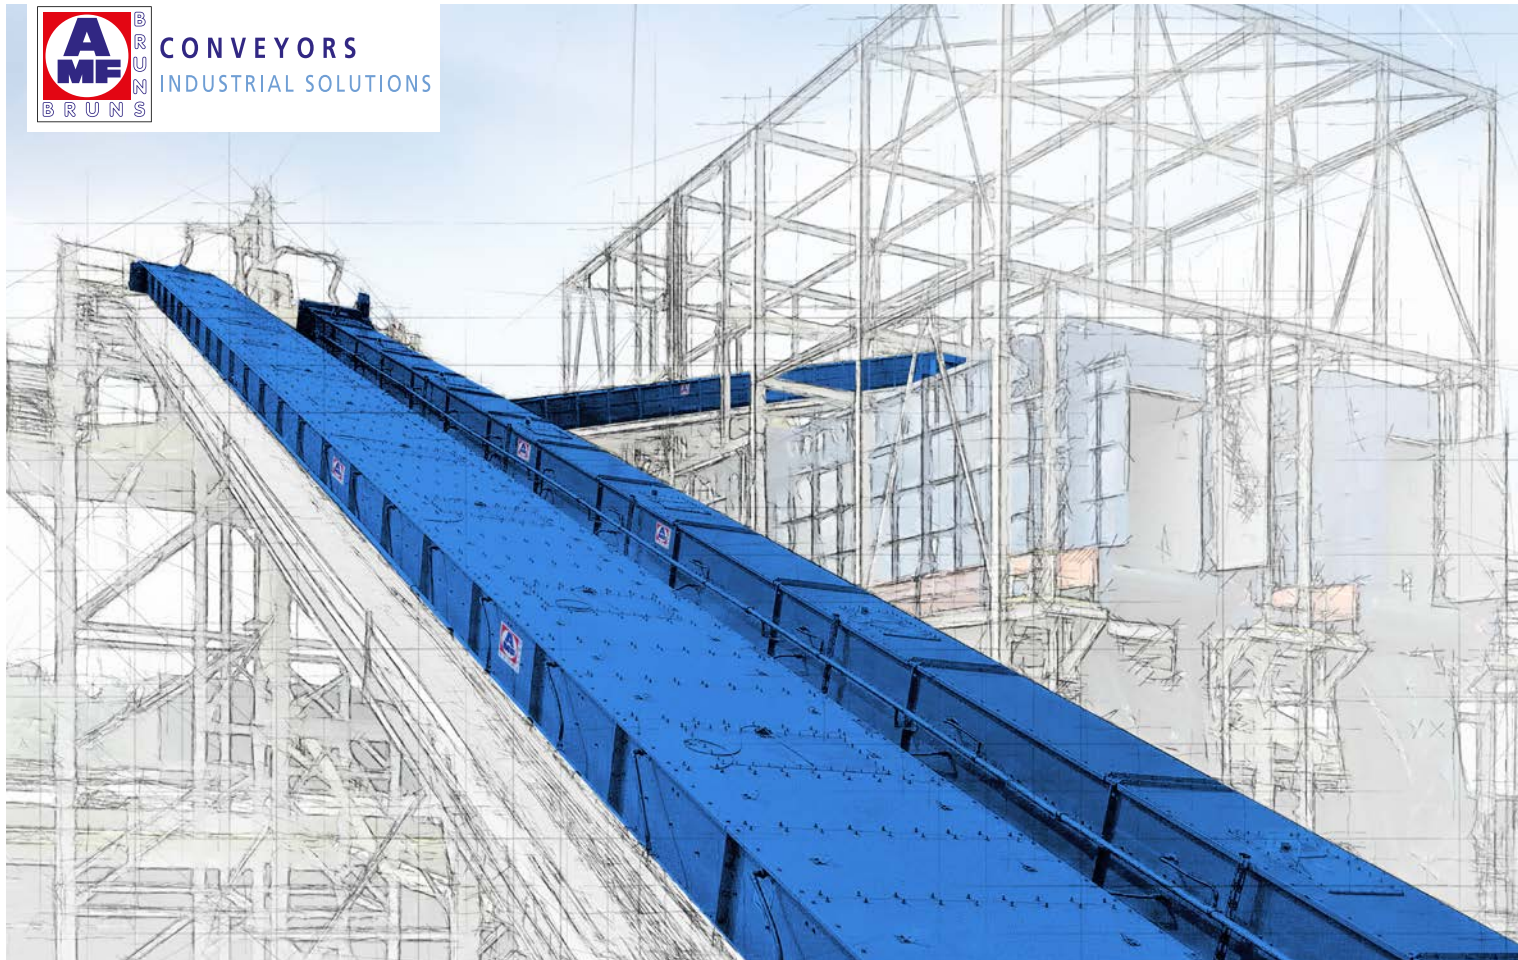

Trough chain conveyors with single-strand chain TKF 315 to TKF 1250

Technical data

Design:	TKF horizontally inclining / TKF L-shape / TKF Z-shape
Materials:	S235JR (St37)/1.4301/1.4571
Types of gear:	bevel gears, flat gears and spur gears
Types of drive:	direct drive, chain drive and coupling drive
Side panel strengths:	3 mm to 6 mm depending on the construction size
Base plate strengths:	4 mm to 8 mm depending on the construction size
Shaft seals:	seal insert
Tensioning station:	rotation speed monitoring / spring-tensioning unit
Drive station:	inspection flaps / finger scrapers / filling level indicator
Chain pitches:	t=142V/t=260
Additional options:	ATEX / recirculation troughs / special attachments / chain breakage monitoring / special materials / special coating / other chains

Trough chain conveyor TKF from AMF-Bruns Compact and versatile

Typical products conveyed:
dust, granules and unwieldy coarse-grained goods

Drive station:
inspection flaps,
finger scrapers,
filling level indicator

Tensioning station:
rotation speed monitoring,
spring-tensioning unit

Design types:
horizontal, L-shape and Z-shape

Additional options:
e.g. chain breakage monitoring,
special attachments, other chains

The benefits of AMF-Bruns trough chain conveyors:

- high conveying power of up to 510 m³/h
- dust-proof
- low space requirement with high conveying power



Please feel free to contact us.



AMF-Bruns GmbH & Co. KG · Hauptstraße 101 · 26689 Apen · Germany
 Phone: +49 (0)44 89 - 72 7100 · info@amf-bruns.de
www.amf-bruns.com