



Airglide conveyors

For gentle and dust-free transport of bulk materials over long conveying distances

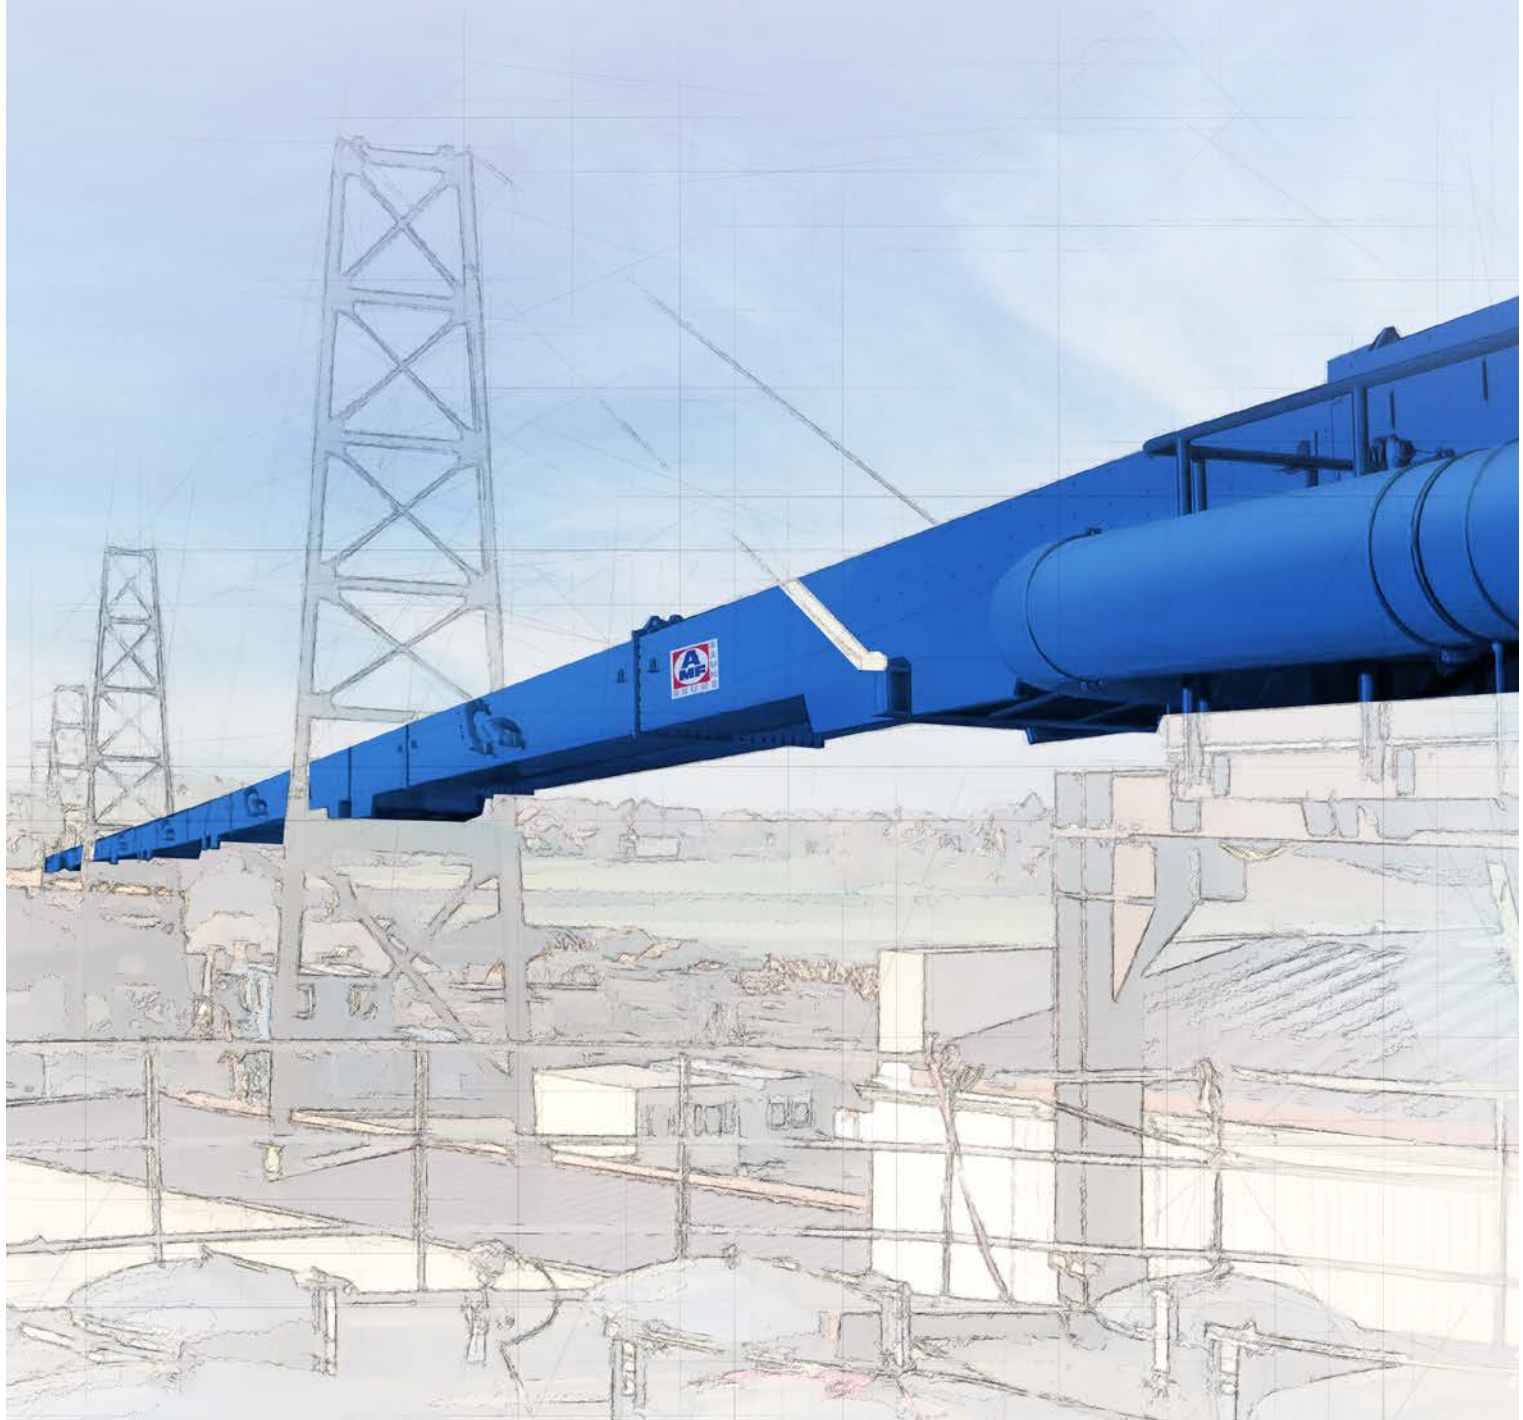

CONVEYORS
INDUSTRIAL SOLUTIONS

www.amf-bruns.com

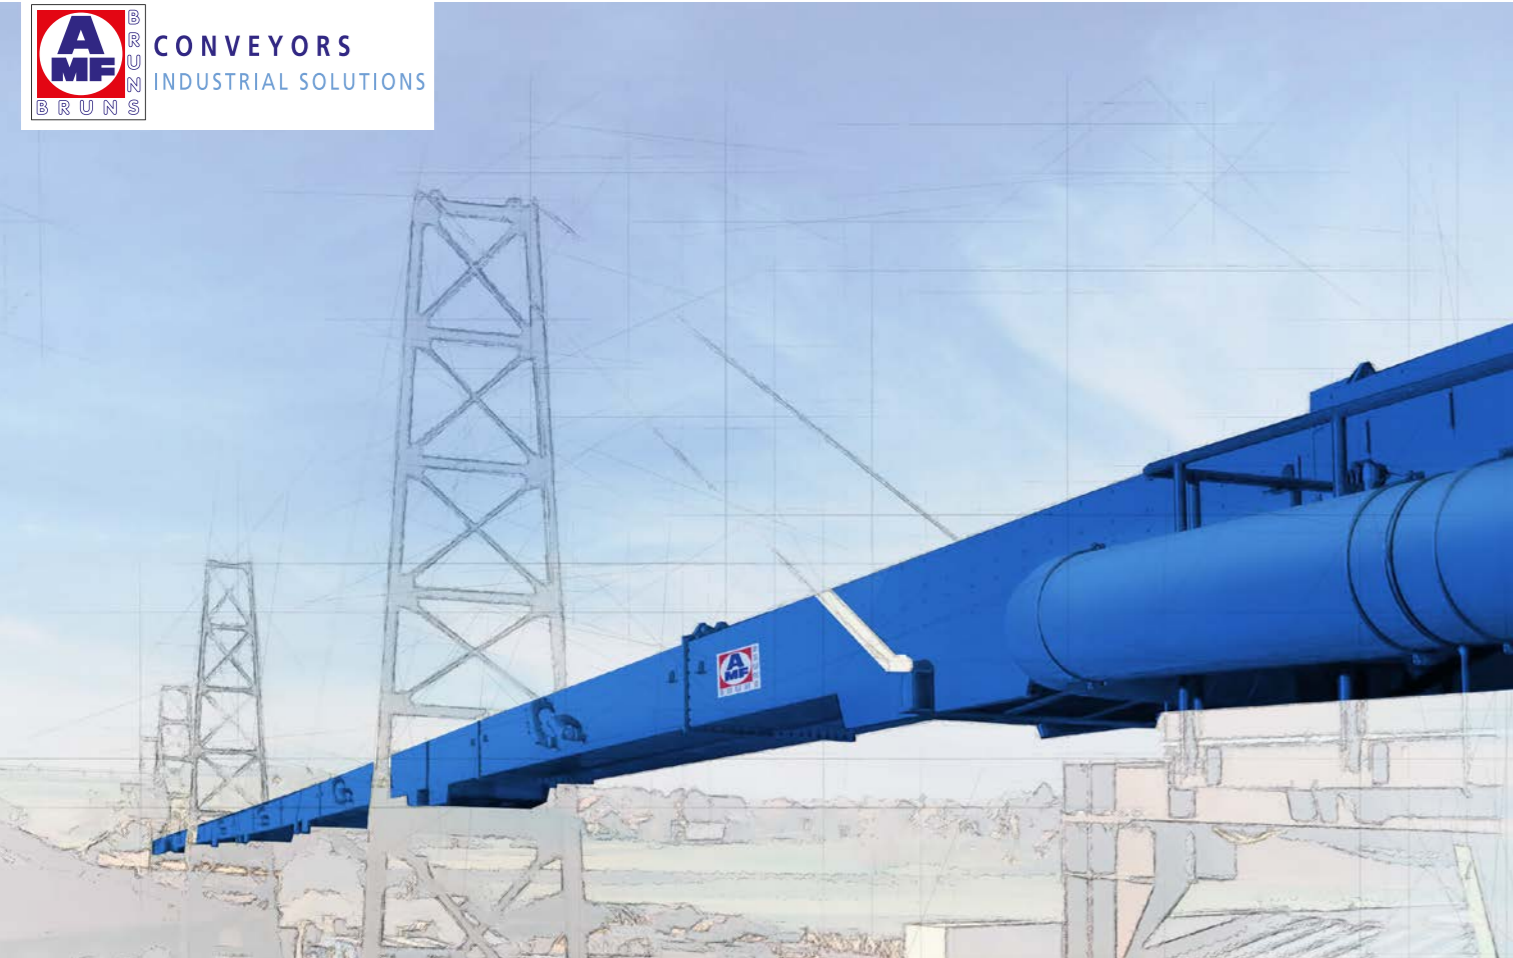

Airslide conveyors

LGF 500 to LGF 1600

Technical data

Sizes:	from 500 mm to 1,600 mm belt width
Conveyor lengths:	from 40 m to 250 m
Cantilever length:	up to 24 m
Conveying power:	230 m³ to 2,300 m³/h (plus 25% reserve)
Conveying speed:	1 to 3 m/s
Other:	special cleaning system in the transfer area / elevation of the system from 0° to 10° / use of sliding belts / radial fan provides pneumatic support for upper and lower belt / split plummer block housings with rolling bearings
Additional options:	ATEX design

Airslide conveyors LGF from AMF-Bruns

For long conveying distances

Typical products conveyed:
dust, granulate, powder and sludge as well as unwieldy coarse-grained goods

Conveying speeds:
up to 3 m/s

Belt widths:
up to 1,600 mm

Conveyor lengths:
up to 250 m

Belt qualities:
food approval,
heat and cold resistant,
oil & grease resistant,
with different inserts

The benefits of AMF-Bruns airslide conveyors:

- dust-free and low-noise operation
- low maintenance costs
- large distances between supports can be implemented
- belt protection thanks to optimized troughing
- optional ATEX design
- no platforms necessary
- optional reversible design



Please feel free to contact us.



AMF-Bruns GmbH & Co. KG · Hauptstraße 101 · 26689 Apen · Germany
 Phone: +49 (0)44 89 - 72 7100 · info@amf-bruns.de
www.amf-bruns.com