



Sliding belt conveyors

For gentle and dust-free transport
of bulk materials in the wood industry

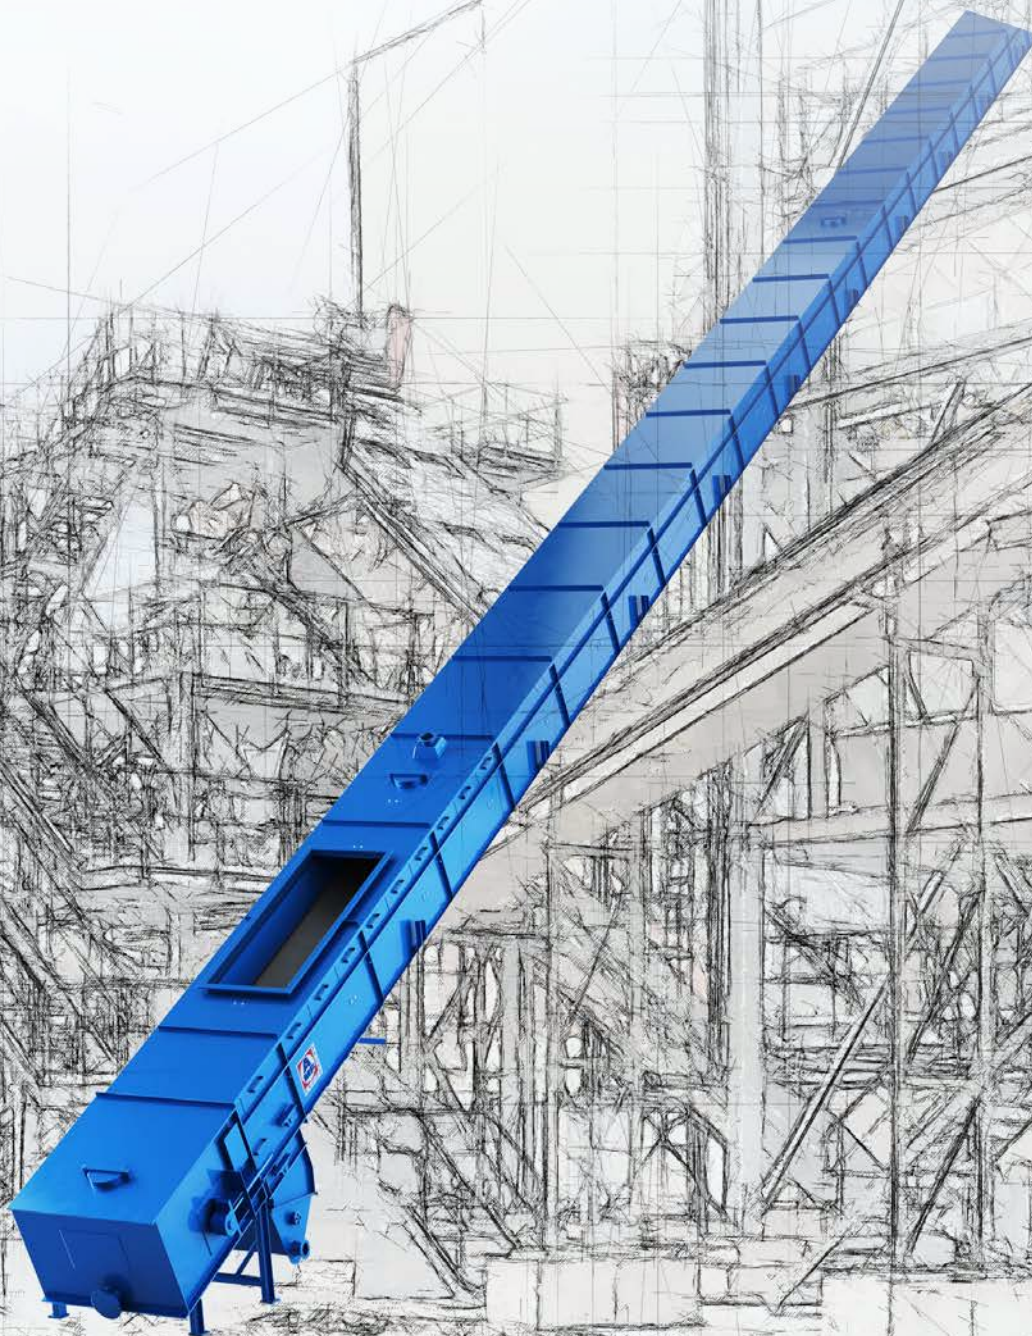

CONVEYORS
INDUSTRIAL SOLUTIONS

www.amf-bruns.com

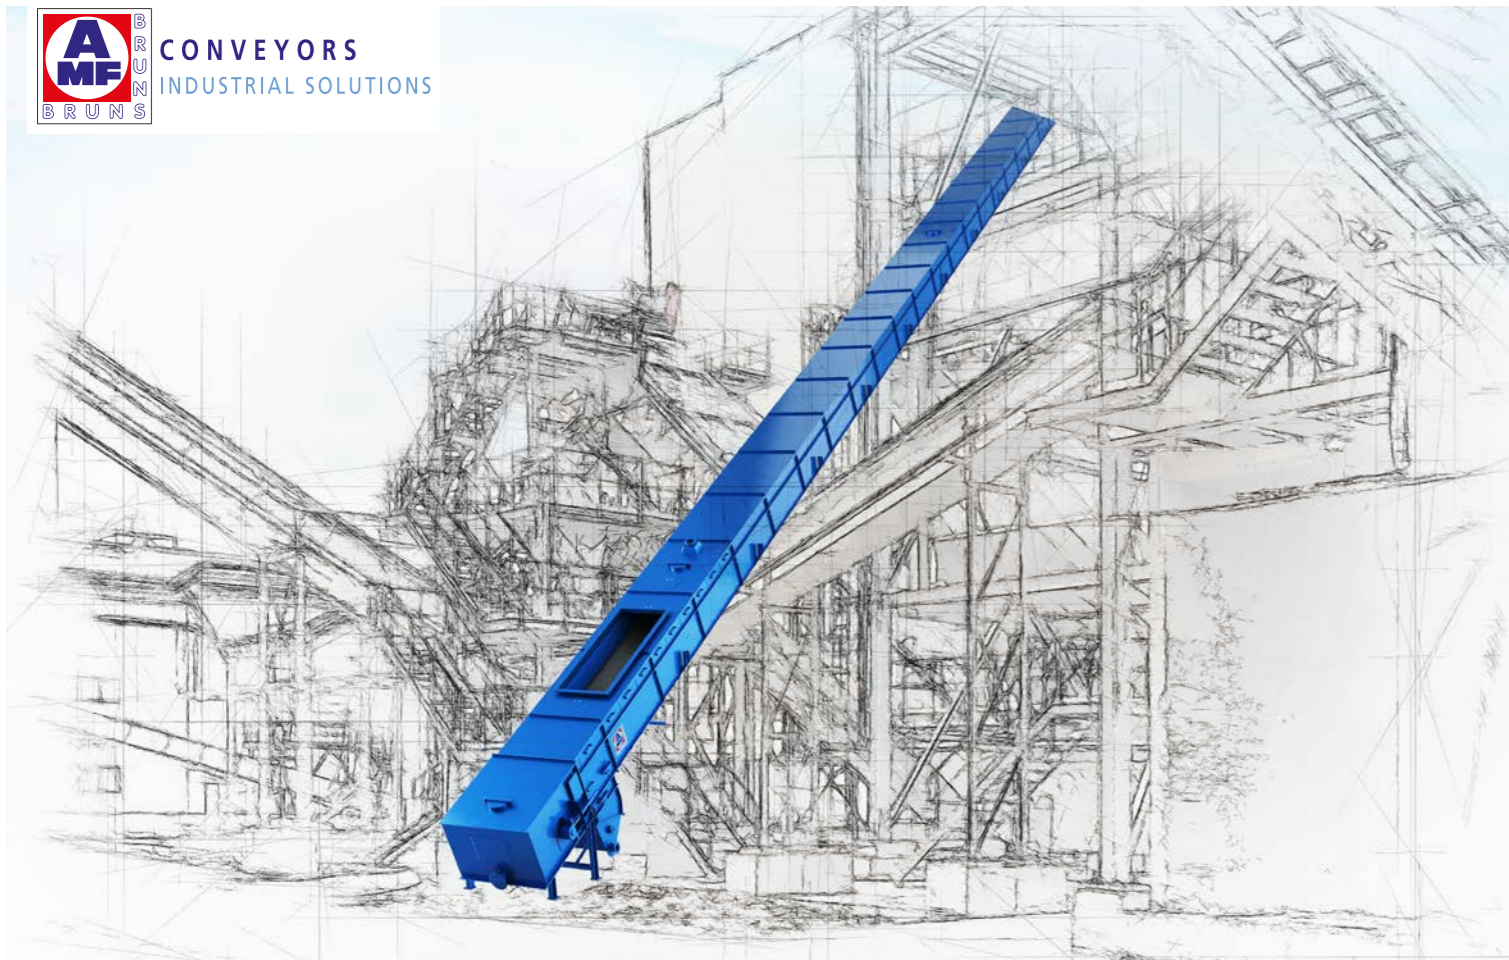

Sliding belt conveyors

GGF 500 to GGF 1400

Technical data


Machine sizes:	from 500 mm to 1,400 mm belt width
Conveyor lengths:	from 10 m to 40 m
Conveying capacity:	200 m ³ to 1,300 m ³ /h (plus 25% reserve)
Conveying speed:	1 m/s to 1.7 m/s
Other:	Base with plastic coating for return/elevation of the system from 0° to 10° without studded belt/ elevation of the system from 11° to 25° with studded belt/use of sliding belts/split plummer block housings with roller bearings
Additional options:	ATEX design

GGF sliding belt conveyors

For transport that's easy on the product

Typical products conveyed:
glued shavings, MDF fibres, shavings,
wood chips, sawdust, wood recycling,
OSB, bark

Conveying speeds:
up to 1.7 m/s

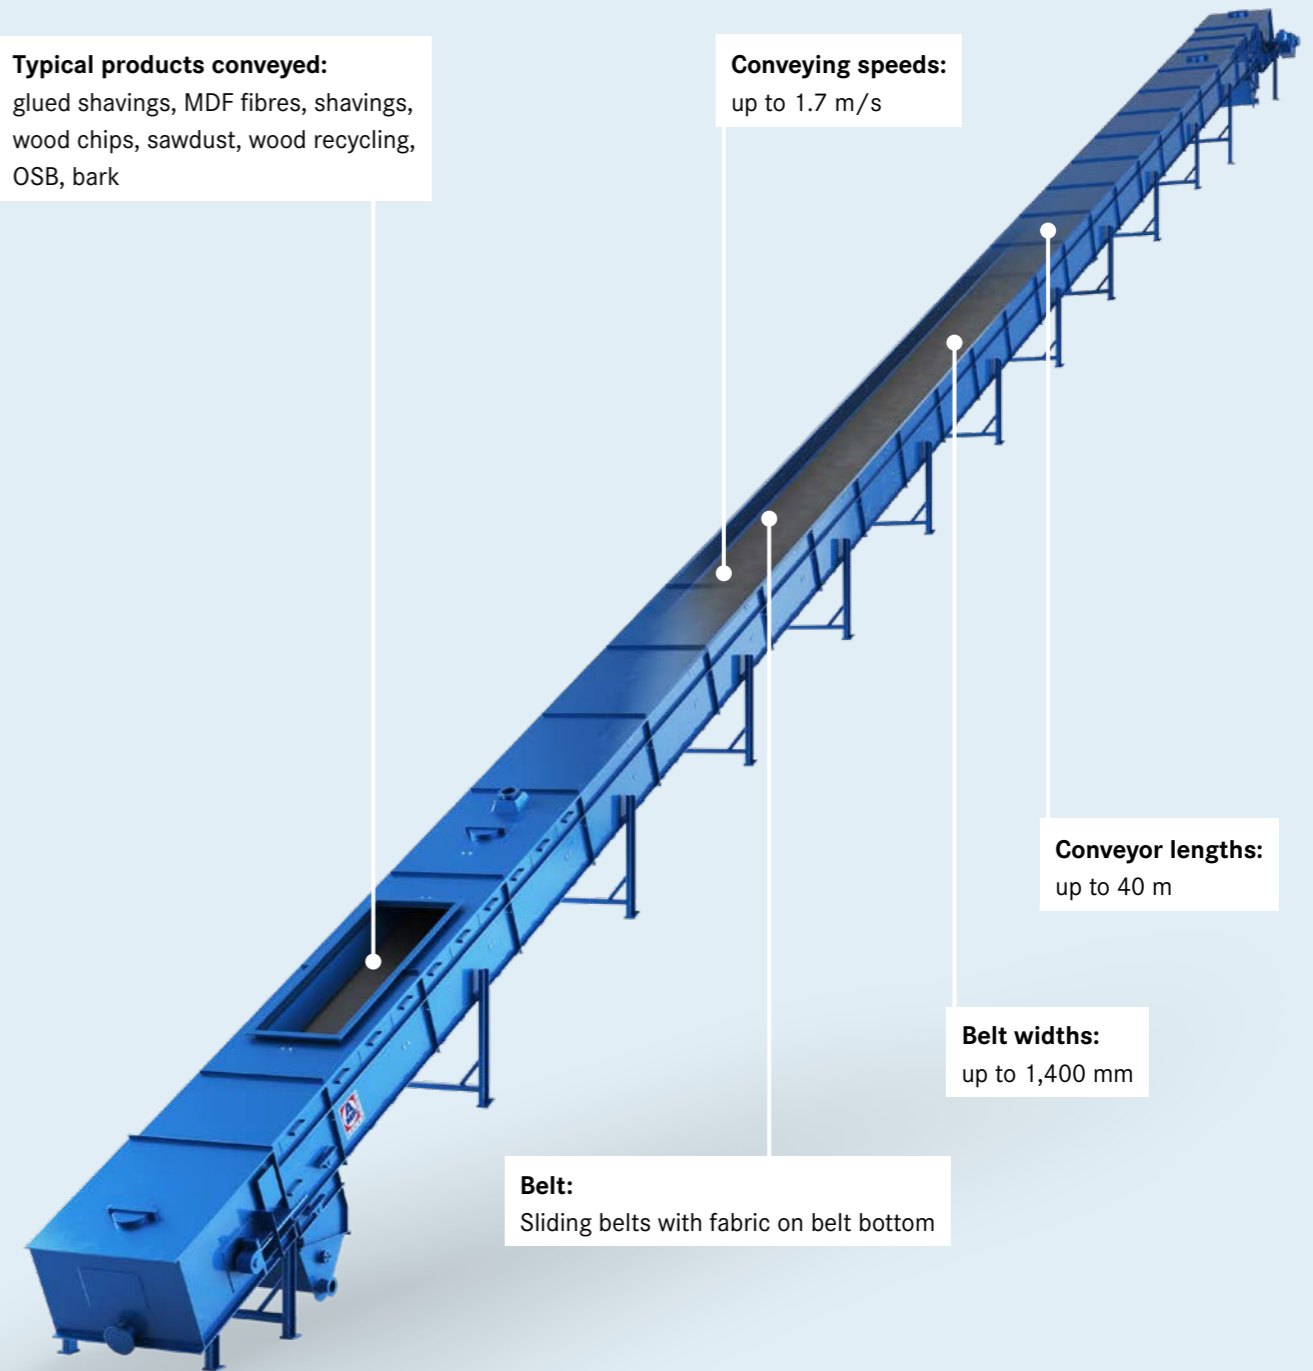

Conveyor lengths:
up to 40 m

Belt widths:
up to 1,400 mm

Belt:
Sliding belts with fabric on belt bottom

The benefits of AMF-Bruns sliding belts:

- dust-free and low-noise operation
- low maintenance costs
- belt protection thanks to optimized troughing
- optional ATEX design
- no platforms necessary
- foldable floors for easy cleaning
- optional reversible design



Please feel free to contact us.



AMF-Brunns GmbH & Co. KG · Hauptstraße 101 · 26689 Apen · Germany
 Phone: +49 (0)44 89 - 72 7100 · info@amf-bruns.de
 www.amf-bruns.com