



LGF-C: Air & glide belt conveyor combination

For gentle and dust-free transport of bulk materials over long and steep conveying distances

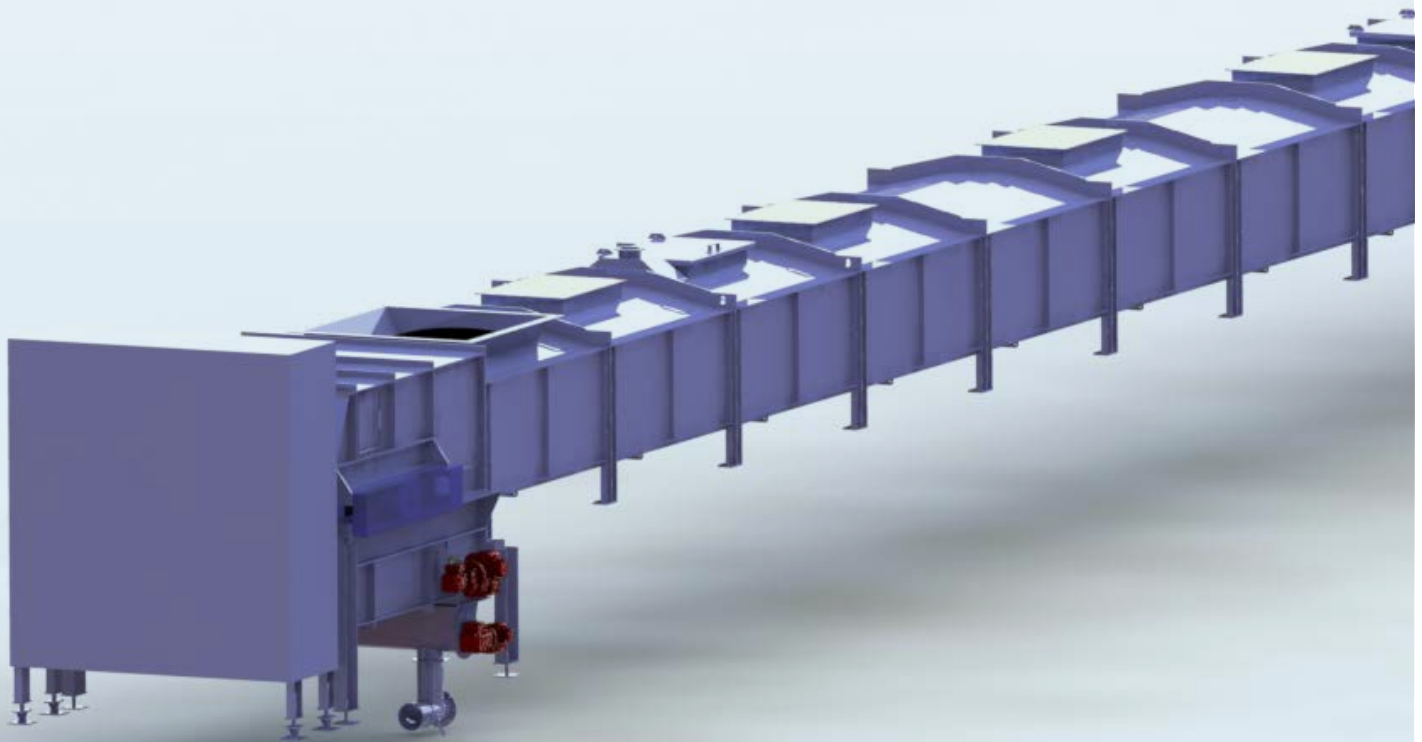

CONVEYORS
INDUSTRIAL SOLUTIONS

www.amf-bruns.com

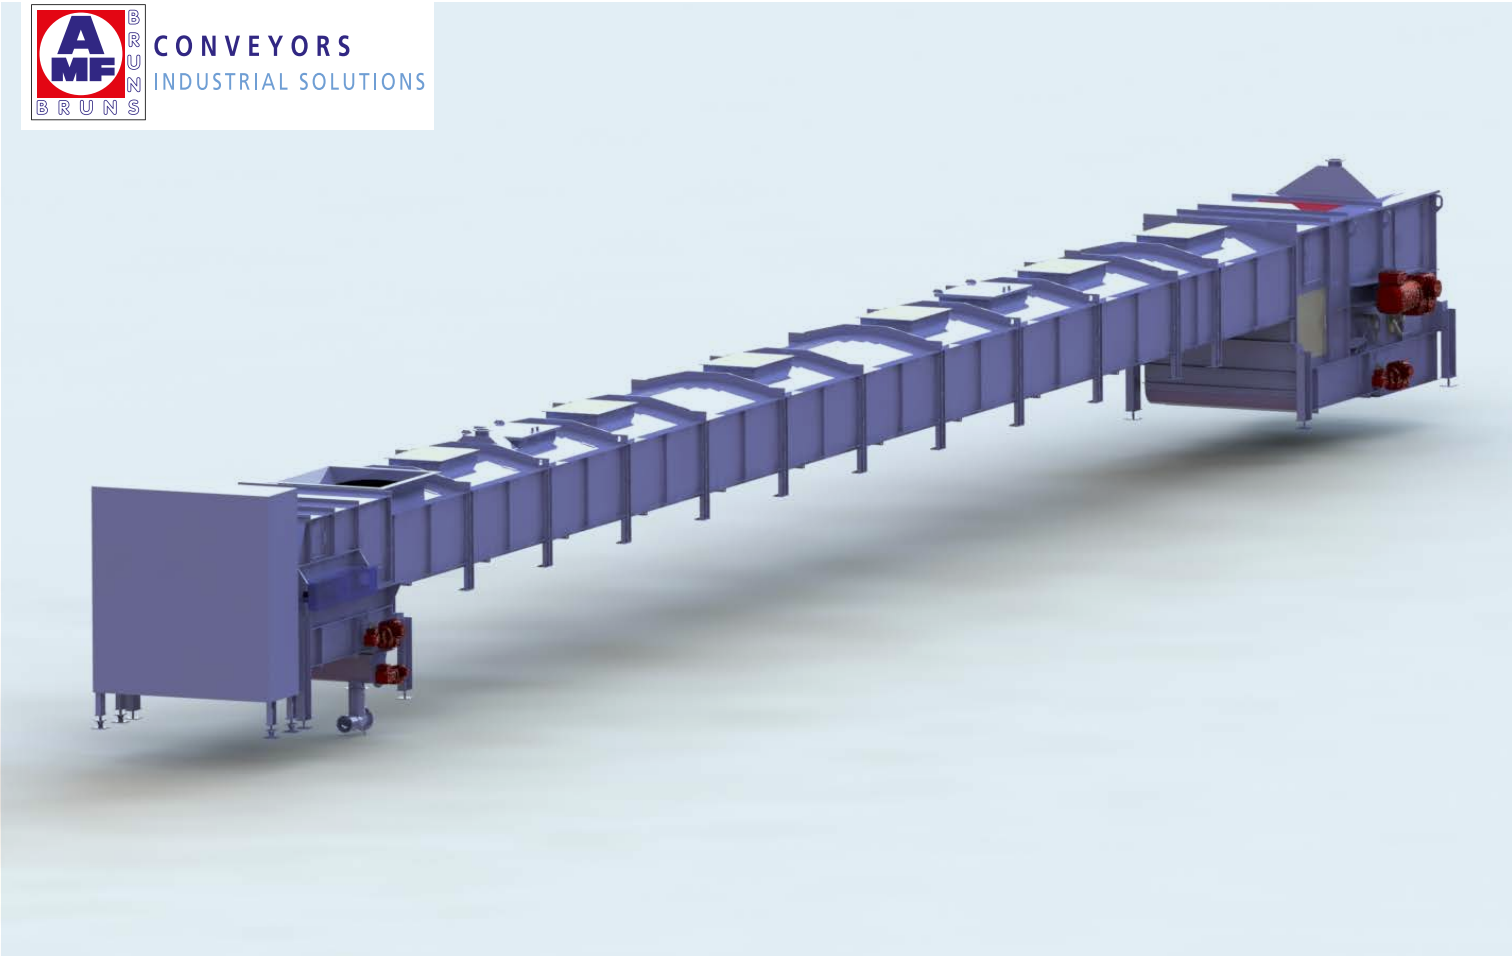

LGF-C: Air & glide belt conveyor combination


LGF-C 500 to LGF-C 1800

Technical data

Sizes:	from 500 mm to 1,800 mm belt width
Conveyor lengths:	from 15 m to 250 m
Cantilever length:	about 4 m
Conveying power:	185 m³/h to 2,265 m³/h (plus 25% reserve)
Products conveyed:	flakes, wood chips, OSB-Strands, fuel material, recycling chips, crushed bark
Other:	Inclines from 0° to 25° /use of plain and cleated sliding belts/ Cleaning conveyor at the drive and deflection point/external split plummer block housing
Additional options:	ATEX design

LGF-C: Air & glide belt conveyor combination

If it needs to be dust-free

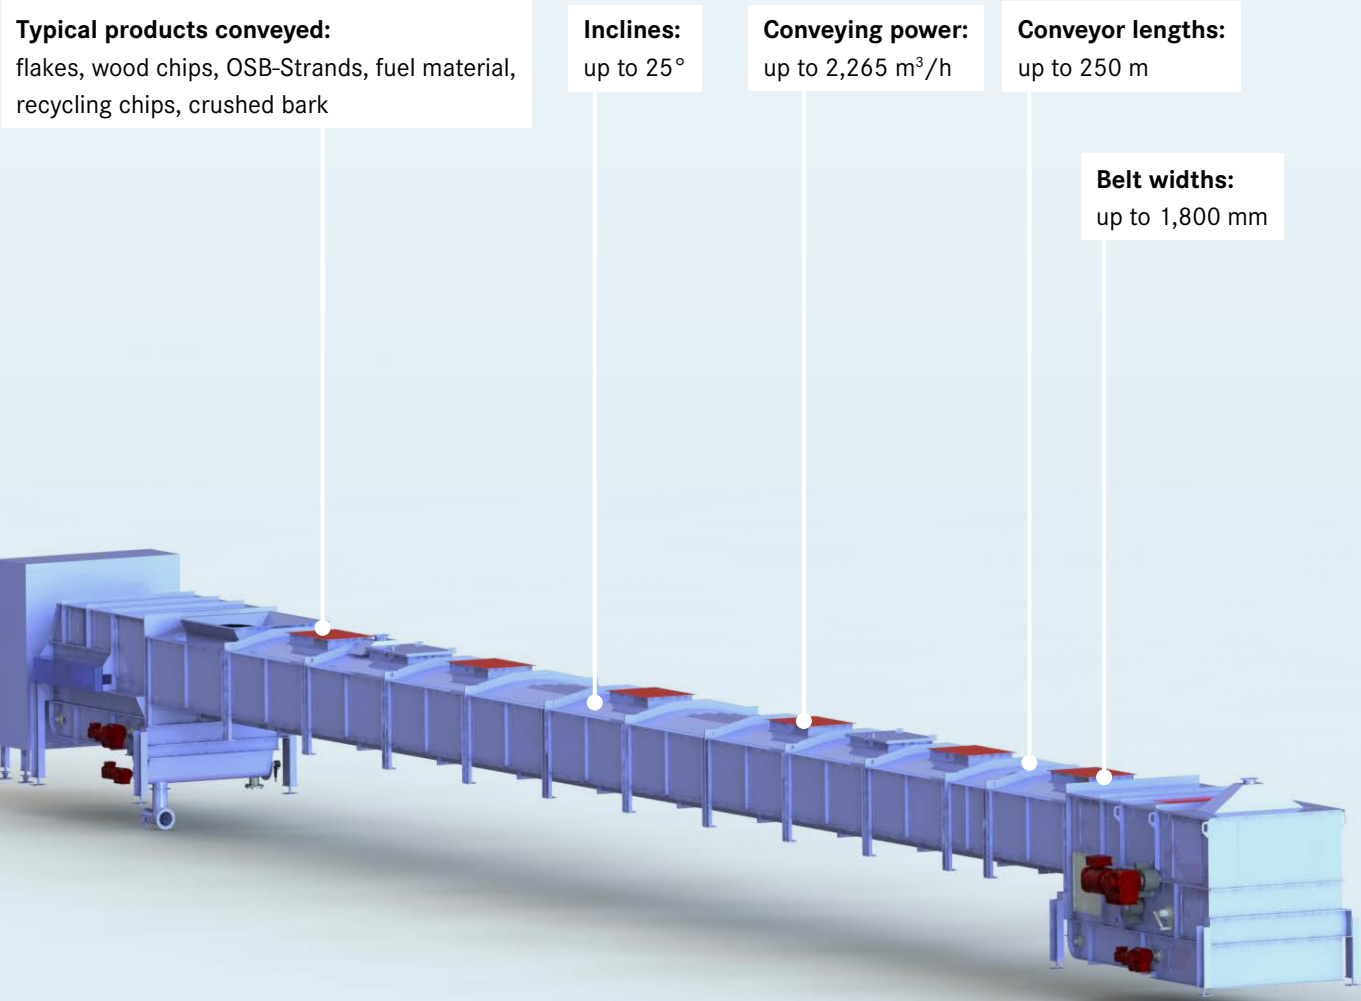

The benefits of the new AMF-Bruns LGF-C:

- dust-free and low-noise operation
- low maintenance costs
- belt protection thanks to optimized troughing
- optional ATEX design
- Closed cleaning systems
- Inclines of up to 25° can be realised
- Conveying distances up to 250 m
- Fewer spare parts
- Transport of large flow rates up to 2,265 m³/h at v= 1.7 m/sec



Please feel free to contact us.



AMF-Bruns GmbH & Co. KG · Hauptstraße 101 · 26689 Apen · Germany
 Phone: +49 (0)44 89 - 72 7100 · info@amf-bruns.de
www.amf-bruns.com